



Wジョイント推進管


J-2N (JSWAS A-2登録管) 継手性能JC 耐震レベル2対応

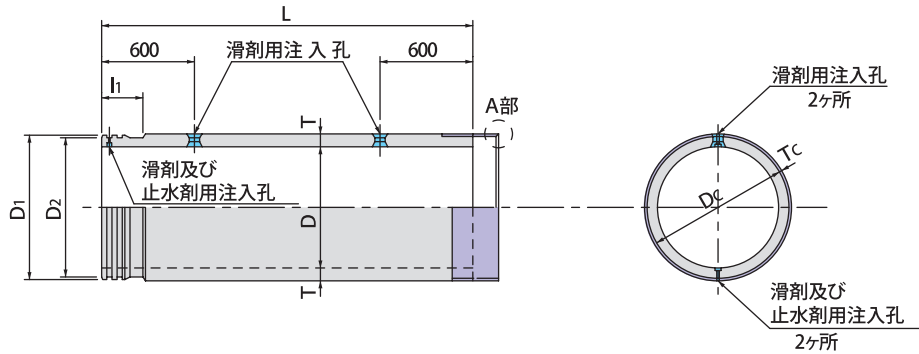


継手部詳細図 呼び径800~2200

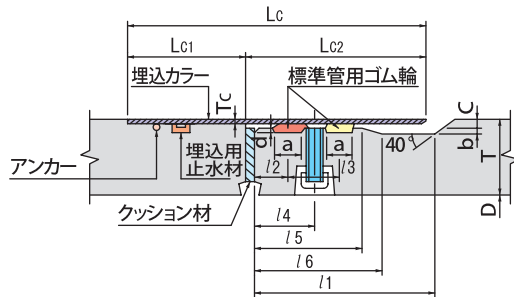

A部詳細図



呼び径2400~3000

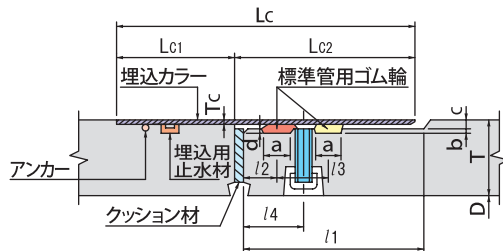

単位：mm

呼び径	管の寸法															埋込カラー部の寸法					参考質量 (kg)
	内径 D	D1	$\pi \cdot D2$	厚さ T	有効長 L	a	b·d	c	l1	l2	l3	l4	l5	l6	Lc1	Lc2	Lc	Tc	Dc		
800	800	942	2922	80															951	1330	
900	900	1062	3299	90															1071	1680	
1000	1000	1182	3676	100		26	6	9			50	60.0	110	130		180		4.5	1191	2070	
1100	1100	1292	4021	105															1301	2380	
1200	1200	1412	4398	115															1421	2850	
1350	1350	1576	4901	125					180	35					150		330		1588	3470	
1500	1500	1756	5466	140															1768	4320	
1650	1650	1926	6000	150	2430														1938	5080	
1800	1800	2096	6535	160		30	8	12			55	62.5	120	140		180		6.0	2108	5910	
2000	2000	2326	7257	175															2338	7150	
2200	2200	2556	7980	190															2568	8540	
2400	2400	2778	8671	205															2792	10090	
2600	2600	3008	9393	220															3022	11710	
2800	2800	3238	10116	235		34	9	16	190	40	60	70.0	-	-	150	190	340	9.0	3252	13420	
3000	3000	3468	10839	250															3482	15340	

側溝・水路類

擁壁類

カルバート類

ヒューム管・推進管

マンホール類

道路製品

集水柵類

その他の製品

NEP工業会製品