




# NSGB

ピッチ P30~P10

■材質 / SUS304

※車両が頻繁に通行する場所や、フォークリフトなどの特殊車両が通行する場所には適しません。

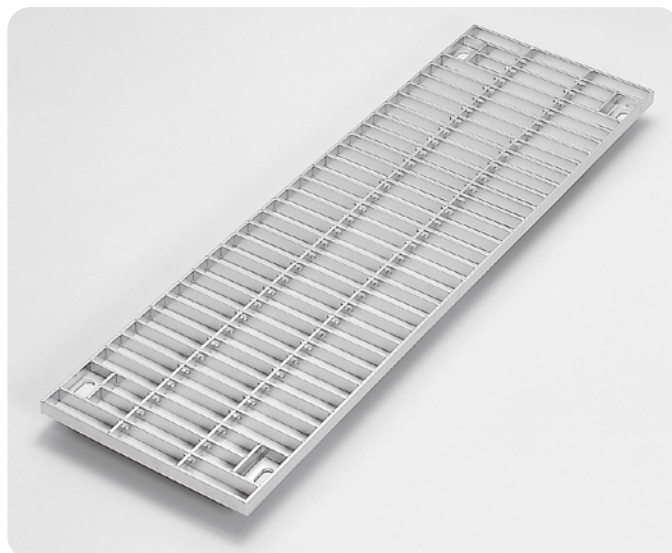

●型式記号・仕様・重量・価格表【P30~P20】

型式記号	溝幅 (mm)	本体寸法 (mm) W×L×H	P30			P22			P20		
			適用荷重 横断用/側溝用	重量 (kg/枚)	価格 (円/枚)	適用荷重 横断用/側溝用	重量 (kg/枚)	価格 (円/枚)	適用荷重 横断用/側溝用	重量 (kg/枚)	価格 (円/枚)
NSGB	100	150×994×20	T-20	4.8	22,200	T-20	5.8	26,900	T-20	6.2	29,000
		150×994×25	T-20	5.8	27,700	T-20	7.2	32,300	T-20	7.6	34,800
		150×994×32	T-20	7.4	32,300	T-20	9.1	38,200	T-20	9.7	41,300
	150	200×994×20	T-2/T-14	5.8	28,000	T-6/T-14	7.3	32,600	T-14/T-20	7.7	35,200
		200×994×25	T-14	7.2	31,500	T-20	9.0	38,400	T-20	9.6	41,500
		200×994×32	T-20	9.1	38,200	T-20	11.5	44,900	T-20	12.2	48,600
	200	250×994×20	歩道用/T-2	6.9	32,100	T-2	8.7	40,000	T-2/T-6	9.4	43,300
		250×994×25	T-2/T-6	8.5	38,900	T-2/T-14	11.0	46,500	T-6/T-14	11.6	50,500
		250×994×32	T-14/T-20	10.9	45,400	T-20	13.8	54,400	T-20	14.8	59,100
		250×994×38	T-20	12.8	51,600	T-20	16.3	62,300	T-20	17.5	67,900
	250	300×994×20	歩道用	8.5	37,700	歩道用/T-2	10.7	44,800	歩道用/T-2	11.4	48,500
		300×994×25	歩道用/T-2	10.3	43,200	T-2	13.1	52,300	T-2	14.1	56,800
		300×994×32	T-2/T-6	13.1	50,800	T-6/T-14	16.6	61,300	T-14/T-20	17.5	66,700
		300×994×38	T-14	15.3	58,100	T-14/T-20	19.6	70,800	T-20	21.0	77,200
		300×994×45	T-14/T-20	17.7	65,600	T-20	22.6	84,000	T-20	24.3	91,700
	300	300×994×50	T-20	20.0	69,000	T-20	25.5	90,400	T-20	27.5	98,700
		350×994×20	歩道用	9.6	41,000	歩道用/T-2	12.2	50,600	歩道用/T-2	13.1	55,000
		350×994×25	歩道用/T-2	11.7	49,600	T-2	14.9	60,400	T-2	16.0	65,800
		350×994×32	T-2	14.8	58,500	T-2/T-6	18.9	71,000	T-2/T-14	20.4	77,400
		350×994×38	T-2/T-6	17.4	66,600	T-14	22.3	81,600	T-14/T-20	24.0	89,100
		350×994×45	T-14	20.1	78,400	T-14/T-20	25.8	97,000	T-20	27.8	106,000
	350	350×994×50	T-14/T-20	22.7	83,700	T-20	29.2	104,300	T-20	31.5	114,000
		400×994×20	歩道用	11.1	46,800	歩道用	14.1	55,300	歩道用	15.1	60,100
		400×994×25	歩道用	13.5	54,000	歩道用/T-2	17.2	66,200	歩道用/T-2	18.5	72,100
		400×994×32	歩道用/T-2	17.0	63,800	T-2	21.7	78,000	T-2	23.4	85,000
		400×994×38	T-2	19.9	73,000	T-2/T-6	25.6	90,100	T-6/T-14	27.1	98,400
		400×994×45	T-2/T-6	22.9	85,600	T-14	29.5	107,300	T-14/T-20	31.5	117,300
	400	400×994×50	T-14	25.9	91,400	T-20	33.4	115,500	T-20	35.9	126,300
450×994×20		歩道用	12.2	52,300	歩道用	15.5	62,300	歩道用	16.7	67,900	
450×994×25		歩道用	14.7	60,300	歩道用/T-2	19.1	74,300	歩道用/T-2	20.5	81,100	
450×994×32		歩道用/T-2	18.7	71,100	T-2	24.1	87,400	T-2	25.9	95,400	
450×994×38		T-2	22.0	81,500	T-2	28.4	101,000	T-2/T-6	31.5	110,400	
450×994×45		T-2	25.3	95,000	T-6/T-14	32.8	120,100	T-14	35.7	131,500	
450	450×994×50	T-2/T-6	28.6	101,100	T-14	37.1	129,400	T-14	39.9	141,600	
	500×994×20	歩道用	13.7	55,800	歩道用	17.4	66,800	歩道用	18.7	72,800	
	500×994×25	歩道用	16.7	64,700	歩道用	21.3	80,000	歩道用/T-2	22.9	87,300	
	500×994×32	歩道用/T-2	21.0	76,500	歩道用/T-2	26.9	94,300	T-2	29.0	103,100	
	500×994×38	歩道用/T-2	24.5	87,700	T-2	31.6	109,100	T-2	34.0	119,300	
	500×994×45	T-2	28.1	102,500	T-2/T-6	36.5	130,400	T-6	39.2	142,700	
500×994×50	T-2/T-6	31.6	109,100	T-6/T-14	41.3	140,600	T-14	44.4	151,200		