




# NSGBR

ピッチ P30~P10  
■材質 / SUS304

※車両が頻繁に通行する場所や、フォークリフトなどの特殊車両が通行する場所には適しません。

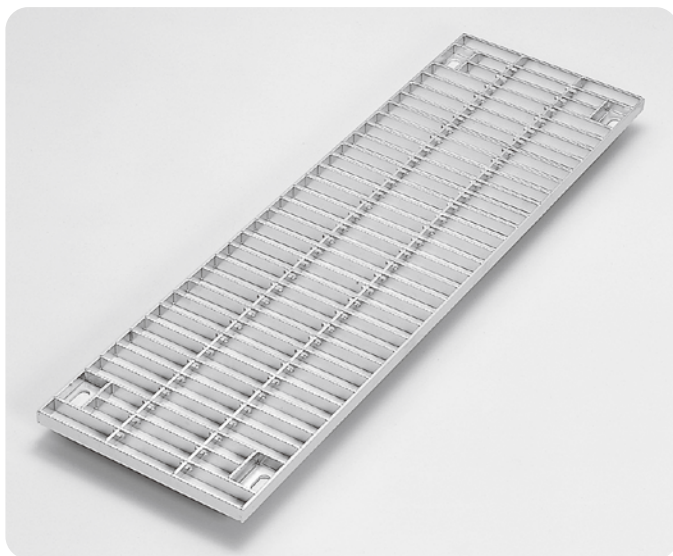

●型式記号・仕様・重量・価格表 [P30~P20]

型式記号	溝幅 (mm)	本体寸法 (mm) W×L×H	P30			P22			P20		
			適用荷重 横断用/側溝用	重量 (kg/枚)	価格 (円/枚)	適用荷重 横断用/側溝用	重量 (kg/枚)	価格 (円/枚)	適用荷重 横断用/側溝用	重量 (kg/枚)	価格 (円/枚)
NSGBR ボコボコ	100	150×994×20	T-20	4.8	27,200	T-20	5.8	31,700	T-20	6.2	34,200
		150×994×25	T-20	5.8	32,200	T-20	7.2	38,300	T-20	7.6	41,400
		150×994×32	T-20	7.4	38,200	T-20	9.1	45,900	T-20	9.7	49,700
	150	200×994×20	T-2/T-14	5.8	31,700	T-6/T-14	7.3	38,800	T-14/T-20	7.7	42,000
		200×994×25	T-14	7.2	37,500	T-20	9.0	46,300	T-20	9.6	50,200
		200×994×32	T-20	9.1	42,800	T-20	11.5	55,800	T-20	12.2	60,700
	200	250×994×20	歩道用/T-2	6.9	38,500	T-2	8.7	47,700	T-2/T-6	9.4	51,700
		250×994×25	T-2/T-6	8.5	43,800	T-2/T-14	11.0	56,600	T-6/T-14	11.6	61,500
		250×994×32	T-14/T-20	10.9	51,100	T-20	13.8	68,800	T-20	14.8	75,000
		250×994×38	T-20	12.8	56,800	T-20	16.3	75,800	T-20	17.5	82,700
	250	300×994×20	歩道用	8.5	44,900	歩道用/T-2	10.7	55,400	歩道用/T-2	11.4	60,200
		300×994×25	歩道用/T-2	10.3	51,000	T-2	13.1	64,500	T-2	14.1	70,300
		300×994×32	T-2/T-6	13.1	57,700	T-6/T-14	16.6	77,100	T-14/T-20	17.5	84,200
		300×994×38	T-14	15.3	66,200	T-14/T-20	19.6	92,500	T-20	21.0	101,100
		300×994×45	T-14/T-20	17.7	80,000	T-20	22.6	103,000	T-20	24.3	112,600
		300×994×50	T-20	20.0	81,700	T-20	25.5	113,400	T-20	27.5	124,000
	300	350×994×20	歩道用	9.6	51,300	歩道用/T-2	12.2	63,900	歩道用/T-2	13.1	69,600
		350×994×25	歩道用/T-2	11.7	58,200	T-2	14.9	74,800	T-2	16.0	81,500
		350×994×32	T-2	14.8	67,600	T-2/T-6	18.9	90,500	T-2/T-14	20.4	98,800
		350×994×38	T-2/T-6	17.4	77,700	T-14	22.3	106,300	T-14/T-20	24.0	116,300
		350×994×45	T-14	20.1	92,800	T-14/T-20	25.8	121,600	T-20	27.8	133,100
		350×994×50	T-14/T-20	22.7	95,900	T-20	29.2	128,800	T-20	31.5	141,000
	350	400×994×20	歩道用	11.1	55,900	歩道用	14.1	70,200	歩道用	15.1	76,500
		400×994×25	歩道用	13.5	64,900	歩道用/T-2	17.2	82,800	歩道用/T-2	18.5	90,400
		400×994×32	歩道用/T-2	17.0	70,600	T-2	21.7	98,800	T-2	23.4	108,000
		400×994×38	T-2	19.9	84,200	T-2/T-6	25.6	115,200	T-6/T-14	27.1	126,000
		400×994×45	T-2/T-6	22.9	100,400	T-14	29.5	128,800	T-14/T-20	31.5	141,000
		400×994×50	T-14	25.9	102,100	T-20	33.4	142,300	T-20	35.9	155,800
400	450×994×20	歩道用	12.2	62,400	歩道用	15.5	78,500	歩道用	16.7	85,700	
	450×994×25	歩道用	14.7	72,600	歩道用/T-2	19.1	92,800	歩道用/T-2	20.5	101,400	
	450×994×32	歩道用/T-2	18.7	82,900	T-2	24.1	112,300	T-2	25.9	122,800	
	450×994×38	T-2	22.0	95,200	T-2	28.4	128,400	T-2/T-6	31.5	140,500	
	450×994×45	T-2	25.3	111,700	T-6/T-14	32.8	144,600	T-14	35.7	158,400	
	450×994×50	T-2/T-6	28.6	116,900	T-14	37.1	160,900	T-14	39.9	176,300	
450	500×994×20	歩道用	13.7	67,000	歩道用	17.4	84,700	歩道用	18.7	92,500	
	500×994×25	歩道用	16.7	78,000	歩道用	21.3	100,900	歩道用/T-2	22.9	110,300	
	500×994×32	歩道用/T-2	21.0	87,500	歩道用/T-2	26.9	123,800	T-2	29.0	133,100	
	500×994×38	歩道用/T-2	24.5	102,700	T-2	31.6	142,200	T-2	34.0	155,600	
	500×994×45	T-2	28.1	122,000	T-2/T-6	36.5	157,900	T-6	39.2	173,000	
	500×994×50	T-2/T-6	31.6	125,500	T-6/T-14	41.3	173,500	T-14	44.4	190,200	