




## みぞぶたボルト固定式(FB4mmプレーンタイプ)

# NSGB

ピッチ P30~P10

■材質 / SUS304

※車両が頻繁に通行する場所や、フォークリフトなどの特殊車両が通行する場所には適しません。

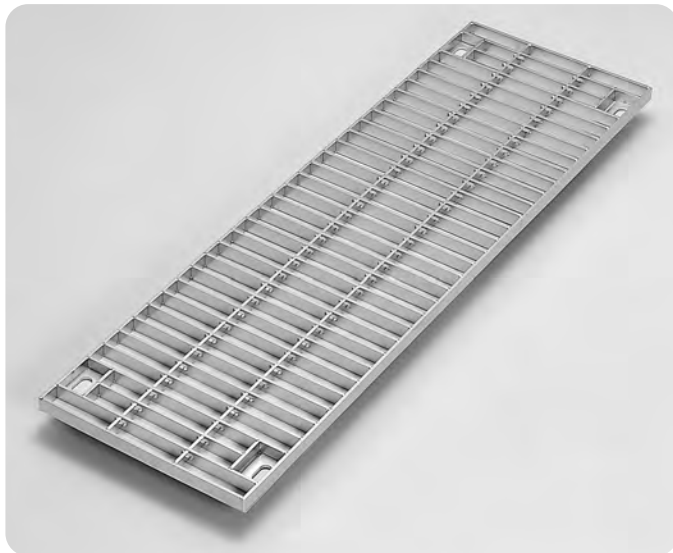

### ●型式記号・仕様・重量・価格表【P30~P20】

型式記号	溝幅 (mm)	本体寸法 (mm) W×L×H	P30			P22			P20		
			適用荷重 横断用/側溝用	重量 (kg/枚)	価格 (円/枚)	適用荷重 横断用/側溝用	重量 (kg/枚)	価格 (円/枚)	適用荷重 横断用/側溝用	重量 (kg/枚)	価格 (円/枚)
NSGB	100	150×994×20	T-20	4.8	25,400	T-20	5.8	31,100	T-20	6.2	33,600
		150×994×25	T-20	5.8	32,000	T-20	7.2	37,600	T-20	7.6	40,600
		150×994×32	T-20	7.4	37,600	T-20	9.1	44,700	T-20	9.7	48,500
	150	200×994×20	T-2/T-14	5.8	32,400	T-6/T-14	7.3	38,000	T-14/T-20	7.7	41,100
		200×994×25	T-14	7.2	36,600	T-20	9.0	45,000	T-20	9.6	48,700
		200×994×32	T-20	9.1	44,700	T-20	11.5	52,800	T-20	12.2	57,300
	200	250×994×20	歩道用/T-2	6.9	37,300	T-2	8.7	46,900	T-2/T-6	9.4	50,900
		250×994×25	T-2/T-6	8.5	45,600	T-2/T-14	11.0	54,800	T-6/T-14	11.6	59,600
		250×994×32	T-14/T-20	10.9	53,400	T-20	13.8	64,300	T-20	14.8	70,000
		250×994×38	T-20	12.8	61,000	T-20	16.3	73,900	T-20	17.5	80,700
	250	300×994×20	歩道用	8.5	44,100	歩道用/T-2	10.7	52,700	歩道用/T-2	11.4	57,200
		300×994×25	歩道用/T-2	10.3	50,800	T-2	13.1	61,800	T-2	14.1	67,200
		300×994×32	T-2/T-6	13.1	60,000	T-6/T-14	16.6	72,700	T-14/T-20	17.5	79,200
		300×994×38	T-14	15.3	68,800	T-14/T-20	19.6	84,200	T-20	21.0	91,900
		300×994×45	T-14/T-20	17.7	77,900	T-20	22.6	100,200	T-20	24.3	109,500
	300	300×994×50	T-20	20.0	82,000	T-20	25.5	107,900	T-20	27.5	118,000
		350×994×20	歩道用	9.6	48,100	歩道用/T-2	12.2	59,700	歩道用/T-2	13.1	65,100
		350×994×25	歩道用/T-2	11.7	58,500	T-2	14.9	71,600	T-2	16.0	78,100
		350×994×32	T-2	14.8	69,300	T-2/T-6	18.9	84,400	T-2/T-14	20.4	92,200
		350×994×38	T-2/T-6	17.4	79,100	T-14	22.3	97,300	T-14/T-20	24.0	106,300
		350×994×45	T-14	20.1	93,400	T-14/T-20	25.8	115,900	T-20	27.8	126,800
	350	350×994×50	T-14/T-20	22.7	99,800	T-20	29.2	124,700	T-20	31.5	136,500
		400×994×20	歩道用	11.1	55,100	歩道用	14.1	65,400	歩道用	15.1	71,200
		400×994×25	歩道用	13.5	63,900	歩道用/T-2	17.2	78,600	歩道用/T-2	18.5	85,800
		400×994×32	歩道用/T-2	17.0	75,700	T-2	21.7	92,900	T-2	23.4	101,400
		400×994×38	T-2	19.9	86,900	T-2/T-6	25.6	107,600	T-6/T-14	27.1	117,600
		400×994×45	T-2/T-6	22.9	102,100	T-14	29.5	128,400	T-14/T-20	31.5	140,500
	400	400×994×50	T-14	25.9	109,100	T-20	33.4	138,300	T-20	35.9	151,400
		450×994×20	歩道用	12.2	61,800	歩道用	15.5	73,900	歩道用	16.7	80,700
		450×994×25	歩道用	14.7	71,500	歩道用/T-2	19.1	88,400	歩道用/T-2	20.5	96,700
450×994×32		歩道用/T-2	18.7	84,600	T-2	24.1	104,300	T-2	25.9	114,000	
450×994×38		T-2	22.0	97,100	T-2	28.4	120,800	T-2/T-6	31.5	132,100	
450×994×45		T-2	25.3	113,500	T-6/T-14	32.8	143,900	T-14	35.7	157,700	
450	450×994×50	T-2/T-6	28.6	120,900	T-14	37.1	155,100	T-14	39.9	169,900	
	500×994×20	歩道用	13.7	66,000	歩道用	17.4	79,400	歩道用	18.7	86,600	
	500×994×25	歩道用	16.7	76,800	歩道用	21.3	95,300	歩道用/T-2	22.9	104,200	
	500×994×32	歩道用/T-2	21.0	91,100	歩道用/T-2	26.9	112,600	T-2	29.0	123,300	
	500×994×38	T-2	24.5	104,700	T-2	31.6	130,600	T-2	34.0	142,900	
	500×994×45	T-2	28.1	122,600	T-2/T-6	36.5	156,300	T-6	39.2	171,200	
500×994×50	T-2/T-6	31.6	130,600	T-6/T-14	41.3	168,700	T-14	44.4	184,800		