




FA/FB(3 phase) Hook suspension

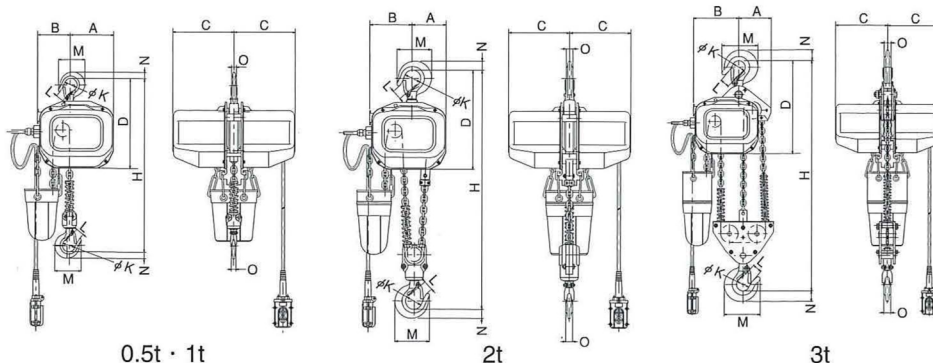

SPECIFICATION

Model No.	Capacity (ton)	Test load (ton)	Standard lift(m)	Standard push button cord length(m)	load chain dia × number of falls	Lifting motor output (kW) (FB)High:Low speed	Lifting speed(m/min)(FB)High:Low speed		Minimum distance H(mm)	Net weight
							50Hz	60Hz		
FA-0.5	0.5	0.625	3	2.5	6.3×1	0.9	7.0	8.4	555	43(46)
FA-1	1	1.25	3	2.5	7.1×1	1.6	6.3	7.5	590	56(60)
FA-2	2	2.5	3	2.5	7.1×2	1.6	3.1	3.8	745	64(71)
FA-3	3	3.75	4	3.5	7.1×3	1.6	2.1	2.5	840	83(90)
FB-0.5	0.5	0.625	3	2.5	6.3×1	0.9:0.25	7.0:1.8	8.4:2.1	555	44(47)
FB-1	1	1.25	3	2.5	7.1×1	1.6:0.4	6.3:1.6	7.5:1.9	590	57(61)
FB-2	2	2.5	3	2.5	7.1×2	1.6:0.4	3.1:0.8	3.8:0.9	745	65(72)
FB-3	3	3.75	4	3.5	7.1×3	1.6:0.4	2.1:0.5	2.5:0.6	840	84(91)

1)The number bracketed in "Net weight" indicates 6m lift.


2)The length of power cord is 4 core-0.5m(standard).

DIMENSIONS

Capacity(ton)	A	B	C	D	K	L	M	N	O
0.5t	161	124	224	316.5	43	26.5	84	19	14
1t	170	128	239	349	50	31	103	25	19
2t	133	165	239	386.5	65	38	135.5	35	26
3t	148	208	239	427	60	43	165	49	32



FAM/FBM(3 phase) Electric chain block with electric trolley

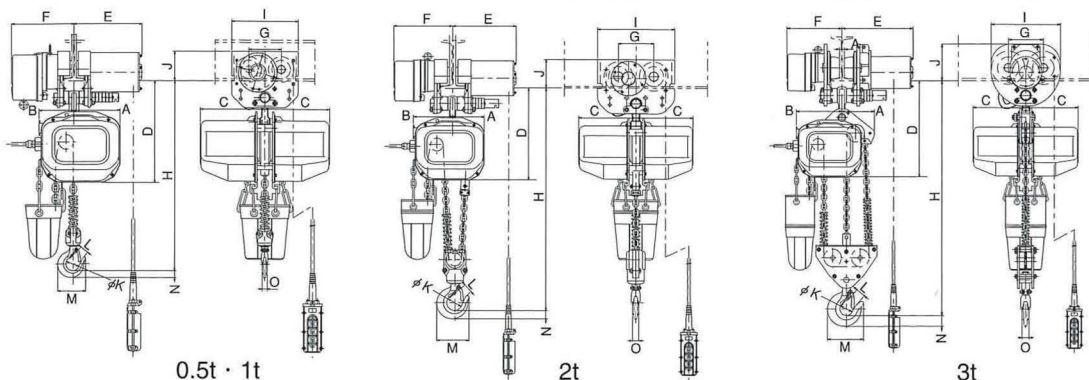

SPECIFICATION

Model No.	Capacity (ton)	Standard lift(m)	Lifting speed(m/min) (FB)High:Low speed	Traversing motor output (kW)	Traversing speed(m/min) 50Hz/60Hz	Minimum distance H(mm)	Traversing beam width	Trolley min radius(mm)	Net weight
FAM-0.5	0.5	3	7.0	0.4	20/24 (MAF type)	695(600) 730(625) 910(750) 1020(860)	75·100 125·150 100·125 150	1100 1100 1500 1500	74(77) 87(91) 104(111) 147(154)
FAM-1	1	3	6.3						
FAM-2	2	3	3.1						
FAM-3	3	4	2.1						
FBM-0.5	0.5	3	7.0:1.8	0.4	20/24 (MAF type)	695(600) 730(625) 910(750) 1020(860)	75·100 125·150 100·125 150	1100 1100 1500 1500	75(78) 88(92) 105(112) 148(155)
FBM-1	1	3	6.3:1.6						
FBM-2	2	3	3.1:0.8						
FBM-3	3	4	2.1:0.5						

1)The number bracketed in "Net weight" indicates 6m lift. 2)The length of power cord in standard is 4 core-0.5m in case of 4 push button, 7 core-0.5m in case of 6 push button.

3)When you need 6 push button for crane instead of 4 push button, "C" should be added to the end of model name. 4)Short time duty for MAF/MAS is 30 minutes.

5)Minimum distance H is in case of that "Traversing beam width" is minimum. 6)The number bracketed in "Minimum distance H(mm)" means direct connection.

DIMENSIONS

Capacity(ton)	A	B	C	*D	*E	*F	G	I	*J	K	L	M	N	O	φ P(diameter of wheel)
0.5t	161	124	224	456.5	251	231	120	246	114	43	26.5	84	19	14	68
1t	170	128	239	489	251	231	120	246	114	50	31	103	25	19	68
2t	133	165	239	550	267	247	148	324	137	65	38	135.5	35	26	83.5
3t	148	208	239	582	324	252	160	316	181	60	43	165	49	32	98

1)Dimension marked by "*" is in case of that "Traversing beam width" is minimum.

※The specification and dimensions may be changed without prior notice for improvement.