




# NSGBR

ピッチ P30~P10

■材質 / SUS304

※車両が頻繁に通行する場所や、フォークリフトなどの特殊車両が通行する場所には適しません。

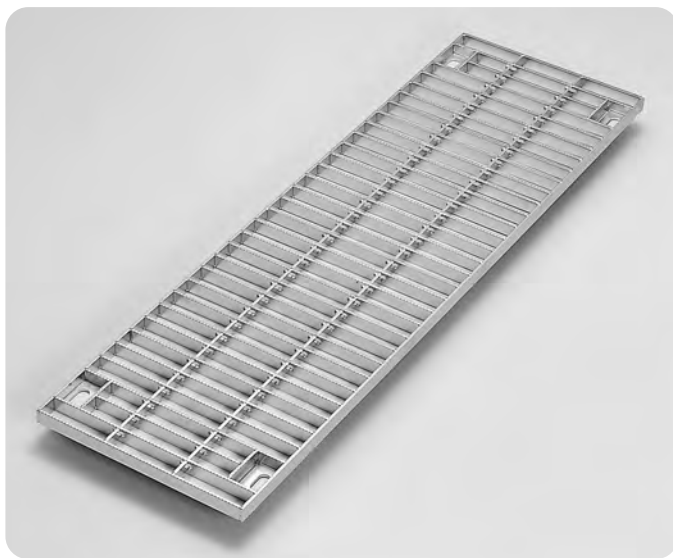

●型式記号・仕様・重量・価格表【P30~P20】

型式記号	溝幅 (mm)	本体寸法 (mm) W×L×H	P30			P22			P20		
			適用荷重 横断用/側溝用	重量 (kg/枚)	価格 (円/枚)	適用荷重 横断用/側溝用	重量 (kg/枚)	価格 (円/枚)	適用荷重 横断用/側溝用	重量 (kg/枚)	価格 (円/枚)
NSGBR ボコボコ	100	150×994×20	T-20	4.8	30,100	T-20	5.8	35,200	T-20	6.2	38,100
		150×994×25	T-20	5.8	35,800	T-20	7.2	42,800	T-20	7.6	46,300
		150×994×32	T-20	7.4	42,600	T-20	9.1	51,400	T-20	9.7	55,800
	150	200×994×20	T-2/T-14	5.8	35,200	T-6/T-14	7.3	43,300	T-14/T-20	7.7	47,000
		200×994×25	T-14	7.2	41,800	T-20	9.0	51,900	T-20	9.6	56,400
		200×994×32	T-20	9.1	47,900	T-20	11.5	62,800	T-20	12.2	68,400
	200	250×994×20	歩道用/T-2	6.9	43,000	T-2	8.7	53,500	T-2/T-6	9.4	58,100
		250×994×25	T-2/T-6	8.5	49,000	T-2/T-14	11.0	63,700	T-6/T-14	11.6	69,300
		250×994×32	T-14/T-20	10.9	57,400	T-20	13.8	77,600	T-20	14.8	84,700
		250×994×38	T-20	12.8	63,900	T-20	16.3	85,600	T-20	17.5	93,500
	250	300×994×20	歩道用	8.5	50,300	歩道用/T-2	10.7	62,300	歩道用/T-2	11.4	67,800
		300×994×25	歩道用/T-2	10.3	57,300	T-2	13.1	72,700	T-2	14.1	79,300
		300×994×32	T-2/T-6	13.1	64,900	T-6/T-14	16.6	87,100	T-14/T-20	17.5	95,200
		300×994×38	T-14	15.3	74,600	T-14/T-20	19.6	104,700	T-20	21.0	114,500
		300×994×45	T-14/T-20	17.7	90,400	T-20	22.6	116,700	T-20	24.3	127,700
	300	300×994×50	T-20	20.0	92,400	T-20	25.5	128,600	T-20	27.5	140,700
		350×994×20	歩道用	9.6	57,600	歩道用/T-2	12.2	72,000	歩道用/T-2	13.1	78,500
		350×994×25	歩道用/T-2	11.7	65,500	T-2	14.9	84,500	T-2	16.0	92,100
		350×994×32	T-2	14.8	76,200	T-2/T-6	18.9	102,400	T-2/T-14	20.4	111,900
		350×994×38	T-2/T-6	17.4	87,800	T-14	22.3	120,500	T-14/T-20	24.0	131,900
		350×994×45	T-14	20.1	105,000	T-14/T-20	25.8	138,000	T-20	27.8	151,100
	350	350×994×50	T-14/T-20	22.7	108,600	T-20	29.2	146,200	T-20	31.5	160,100
		400×994×20	歩道用	11.1	62,900	歩道用	14.1	79,200	歩道用	15.1	86,400
		400×994×25	歩道用	13.5	73,200	歩道用/T-2	17.2	93,600	歩道用/T-2	18.5	102,300
		400×994×32	歩道用/T-2	17.0	79,700	T-2	21.7	111,900	T-2	23.4	122,400
		400×994×38	T-2	19.9	95,200	T-2/T-6	25.6	130,600	T-6/T-14	27.1	143,000
		400×994×45	T-2/T-6	22.9	113,700	T-14	29.5	146,200	T-14/T-20	31.5	160,100
	400	400×994×50	T-14	25.9	115,700	T-20	33.4	161,600	T-20	35.9	177,000
450×994×20		歩道用	12.2	70,300	歩道用	15.5	88,700	歩道用	16.7	96,900	
450×994×25		歩道用	14.7	82,000	歩道用/T-2	19.1	105,000	歩道用/T-2	20.5	114,900	
450×994×32		歩道用/T-2	18.7	93,700	T-2	24.1	127,300	T-2	25.9	139,300	
450×994×38		T-2	22.0	107,800	T-2	28.4	145,700	T-2/T-6	31.5	159,600	
450×994×45		T-2	25.3	126,600	T-6/T-14	32.8	164,200	T-14	35.7	180,000	
450	450×994×50	T-2/T-6	28.6	132,600	T-14	37.1	182,900	T-14	39.9	200,500	
	500×994×20	歩道用	13.7	75,600	歩道用	17.4	95,800	歩道用	18.7	104,700	
	500×994×25	歩道用	16.7	88,100	歩道用	21.3	114,300	歩道用/T-2	22.9	125,000	
	500×994×32	歩道用/T-2	21.0	99,000	歩道用/T-2	26.9	140,500	T-2	29.0	151,100	
	500×994×38	T-2	24.5	116,400	T-2	31.6	161,500	T-2	34.0	176,800	
	500×994×45	T-2	28.1	138,400	T-2/T-6	36.5	179,400	T-6	39.2	196,700	
500×994×50	T-2/T-6	31.6	142,400	T-6/T-14	41.3	197,300	T-14	44.4	216,400		